| | |
|---|---|
| Product | Flameproof Type (내압)<br>Dustproof Type (분진)<br>Alarm Signal |
| Model | FAS-(L/LR/R) |



## Protection Tech. & Hazard Area Classification


Ex db IIC T6 Gb IP66 for Zone 1/2
Ex tD A21 IP66 T85℃ for Zone 21/22

## Ordering Information

FAS - *

| | | | |
|---|---|---|---|
| Type 종류 | LED Flashing | LED Revolving | Bulb Revolving |
| | L | LR | R |
| Principle 방폭구분 | Alarm Signal | | |
| | Flameproof (db / Gas - IIC) | | Dustproof (tD / Dust - A21) |
| | FAS | | |

## Drawing

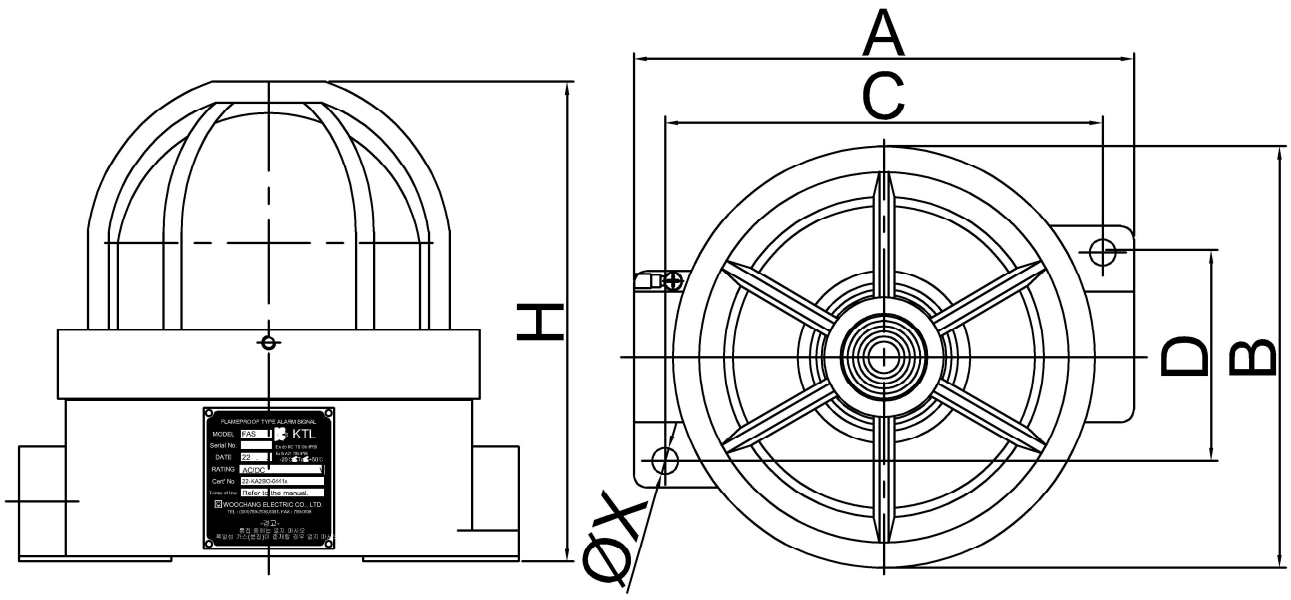


| Material (Standard) | | Electric (Standard) | |
|---|---|---|---|
| Body | Cast Aluminium Alloy | Rated Voltage | Max. AC 240V, DC 12~24V |
| Globe | Heat Resistant Hard Glass | Rated Frequency | 50/60 Hz |
| Globe Guard | Die-Cast Aluminium Alloy | Rated Wattage | Max. 5W |
| Weight | 5kg | | |

## Specification

| Model | Type | Dimension | | | | | | Hub |
|---|---|---|---|---|---|---|---|---|
| | | A | B | C | D | X | H | |
| FAS-L | LED Flashing (LED 점등/점멸식) | 192 | 162 | 168 | 80 | 10 | 184 | 2 - PF 3/4“ (22C) |
| FAS-LR | LED Revolving (LED 반사경 회전식) | | | | | | | |
| FAS-R | Bulb Revolving (전구 반사경 회전식) | | | | | | | |