Product	Flameproof Type (내압) Dustproof Type (분진) Junction Box (IIB)
Model	FCJB-** (Flameproof Type / 내압) FCJB-TD-** (Dustproof Type / 분진)



Protection Tech. & Hazard Area Classification

Ex d IIB T6 IP65 for Zone 1/2


Ex tD A21 T85℃ IP65 for Zone 21/22

Ordering Information

FCJB - ____ - **

Size 크기	400x400	300x500	500x600	600x600	600x800	700x1000
	44	53	56	66	180	200
Principle 방폭구분	Flameproof (d / Gas - IIB)			Dustproof (tD / Dust - A21)		
	(Blank)			TD		
Type 종류	Junction Box					
	FCJB					

Drawing

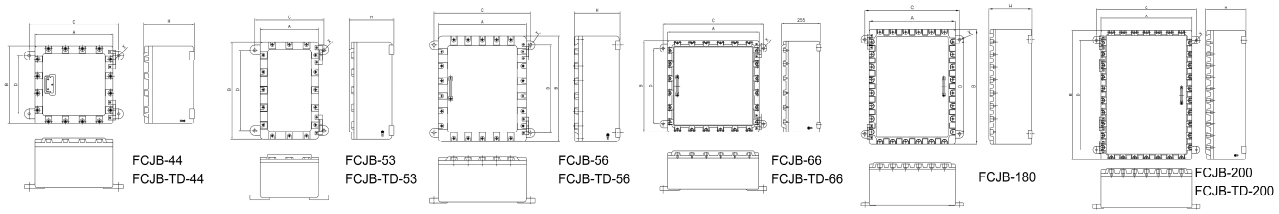

Material (Standard)		Electric (Standard)	
Body & Cover	Cast Aluminium Alloy	Rated Voltage	Max. 600 Vac
Sunshade Cover	STS 304 / EGI	Rated Frequency	50/60 Hz

Box Specification

Model	Box Size	T/B		Dimension					
	L*W*H	Max. A	Max. P	A	B	C	D	X	H
FCJB-44 FCJB-TD-44	400*400*260	200A	50P	400	400	460	300	15	260
FCJB-53 FCJB-TD-53	300*500*230	200A	50P	300	500	380	370	15	230
FCJB-56 FCJB-TD-56	500*600*260	200A	120P	500	600	550	500	15	260
FCJB-66 FCJB-TD-66	600*600*255	200A	140P	600	600	495	665	15	255
FCJB-180	600*800*300	200A	180P	600	800	650	660	18	300
FCJB-200 FCJB-TD-200	700*1000*310	200A	200P	700	1000	770	850	18	310

- Terminal Block Combination(Current / P) is refer to Certificated Drawing (Contact to manufacturer.)

Hub Type Q'ty

Model	Hub Type	Max. Hub Q'ty (PF, NPT, Metric)								
		1/2" (16C) M20x1.5P	3/4" (22C) M25x1.5P	1" (28C) M32x1.5P	1-1/4" (36C) M40x1.5P	1-1/2" (42C) M50x1.5P	2" (54C) M63x1.5P	2-1/2" (70C) M75x1.5P	3" (82C) M90x1.5P	4" (104C) M110x1.5P
FCJB-44	Top&Bottom	20	16	9	7	7	7	4	3	-
FCJB-TD-44	Left&Right	20	16	9	7	7	7	4	3	-
FCJB-53	Top&Bottom	10	10	7	5	5	3	2	2	-
FCJB-TD-53	Left&Right	18	18	13	9	9	5	3	3	-
FCJB-56	Top&Bottom	26	23	13	11	9	7	4	3	-
FCJB-TD-56	Left&Right	32	29	15	13	11	9	5	4	-
FCJB-66	Top&Bottom	32	26	15	13	13	6	5	4	3
FCJB-TD-66	Left&Right	32	26	15	13	13	6	5	4	3
FCJB-180	Top&Bottom	15	15	7	6	6	5	4	3	-
	Left&Right	21	21	10	8	8	7	6	5	-
FCJB-200	Top&Bottom	18	18	9	8	7	6	4	4	-
FCJB-TD-200	Left&Right	27	27	13	11	10	9	6	5	-